

Optimus



electric instantaneous water heater

Most important advantages



Copper shielded heating elements
Reliable technology ensures long life, resistance to water decay and air bubbles.



Tap included in the set



Regulating valve allows for setting comfortable temperature at a maximum possible flow of water.




Fine-stream spray-head guarantees comfortable use and savings on water and energy up to 50%.




3,5kW water heater is equipped with a supply cord and can be plugged into a socket. Water heaters of a greater power should be connected to an electric terminal.

Application




from 3,5kW



5,5kW

Technical data

Type		EPJ Optimus		
Rated power	kW	3,5	4,4	5,5
Rated voltage		230V~		
Rated current	A	15,2	19,1	23,9
Fuse rated current	A	16	20	25
Min. connecting wires section	mm ²	3x1,5		3x2,5
Efficiency (at 30°C/ 86°F temp. rise)	l/min	1,7	2,1	2,7
Supply water pressure	MPa	0,12 ÷ 0,60		
Dimensions	mm	198 x 210 x 95		
Weight	kg	~2,8 ÷ ~3,0		
Inlet and outlet section		Gz 1/2"		
Safety class		IP24		

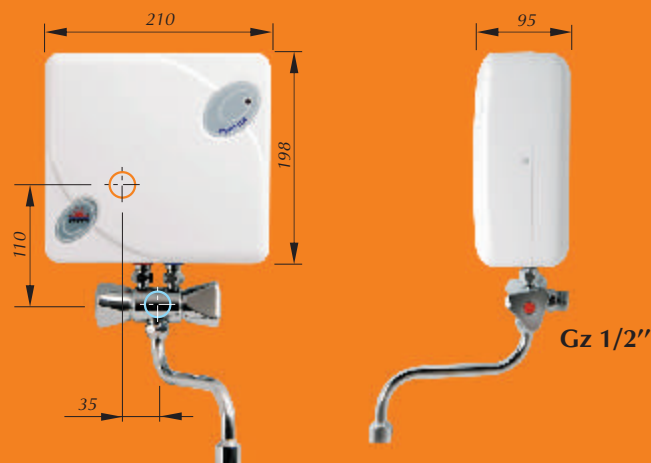

All technical data is based on standards of Central European countries. However, Kospel S.A. is fully flexible to adjust its appliances to other standards.